


Features

- Small size of 0603
- Lead-free and compliant with the European Union RoHS Directive 2011/65/EU
- Fast tripping resettable circuit protection
- Surface mount packaging for automated assembly



Product Dimensions (mm)

Part number	A	B	C	D
	Max.	Max.	Max.	Min.
SMD0603P004TF	1.80	1.00	0.75	0.15

Electrical Characteristics

Part number	I_H	I_T	V_{max}	I_{max}	T_{trip}		Pd_{typ}	R_{min}	R_{1max}
	(A)	(A)	(V)	(A)	Current(A)	Time(S)	(W)	(Ω)	(Ω)
SMD0603P004TF	0.04	0.12	24.0	3.5	0.20	1.00	0.5	4.000	40.000

I_H =Hold current: maximum current at which the device will not trip at 25°C still air.

I_T =Trip current: minimum current at which the device will always trip at 25°C still air.

V_{max} =Maximum voltage device can withstand without damage at rated current.

I_{max} =Maximum fault current device can withstand without damage at rated voltage.

T_{trip} =Maximum time to trip(s) at assigned current.

Pd_{typ} =Typical power dissipation: typical amount of power dissipated by the device when in state air environment.


R_{min} =Minimum device resistance at 25°C prior to tripping.

R_{1max} =Maximum device resistance measured in the nontripped state 1 hour post reflow.

Thermal Derating

LP-TSM004/24	Maximum ambient operating temperature(°C)									
	-40	-20	0	20	25	40	50	60	70	85
Hold Current (A)	0.052	0.048	0.044	0.041	0.040	0.032	0.028	0.024	0.020	0.012
Trip Current (A)	0.156	0.144	0.132	0.123	0.120	0.096	0.084	0.072	0.060	0.036

Solder Reflow Recommendations

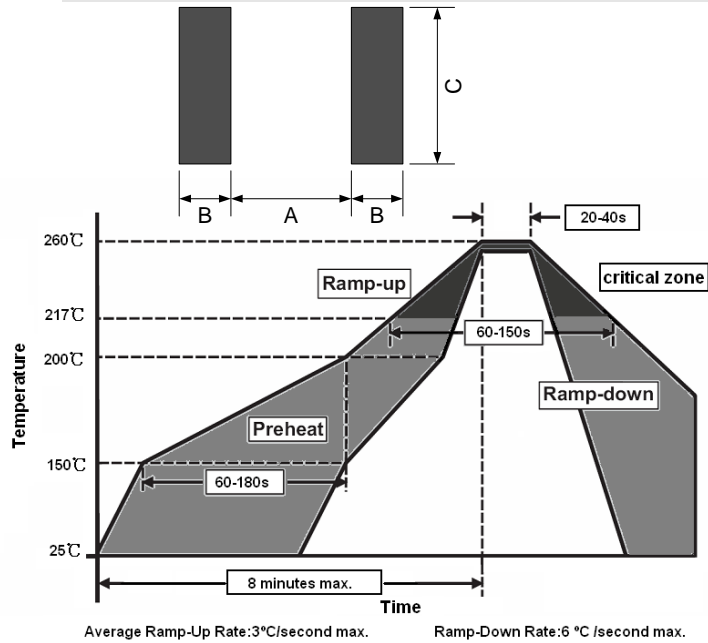

Solder Pad Layouts

Part number	A	B	C
	(mm)	(mm)	(mm)
SMD0603P004TF	0.60	1.10	1.00

* Recommended reflow methods: IR, Vapor phase, hot air oven.

* Devices can be cleaned using standard industry methods and solvents.

Notes:

- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
- Devices are not designed to be wave soldered to the bottom side of the board.

Package Information

Tape & Reel: 5000pcs per reel.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

Caution: Operation beyond the rated voltage or current may result in rupture electrical arcing or flame.