




Features

- Ultra low leakage: nA level
- Operating voltage: 8V
- Low clamping voltage
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
 - Air discharge: $\pm 18\text{kV}$
 - Contact discharge: $\pm 15\text{kV}$
 - IEC61000-4-4 (EFT) 40A (5/50ns)
 - IEC61000-4-5 (Lightning) 40A (5/50 μs)
- RoHS Compliant

Dimensions 0201



Pin Configuration



Applications

- USB 2.0 power and data line
- Set-top box and digital TV
- Digital video interface (DVI)
- Notebook Computers
- SIM Ports
- 10/100 Ethernet

Mechanical Characteristics

- Package: 0201
- Lead Finish: Lead Free
- UL Flammability Classification Rating 94V-0
- Quantity Per Reel: 15,000pcs
- Reel Size: 7 inch

Absolute Maximum Ratings (T_{amb}=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P _{pp}	100	W
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 18	Kv
ESD per IEC 61000-4-2 (Contact)		± 15	
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STJ}	-55 to +150	°C


Electrical Characteristics (TA=25°C unless otherwise specified)

Part Number	Device Marking	V _{RWM} (V)	V _{BR} (V)	I _T (mA)	V _C @1A	V _C		I _R μA (Max)	C (Pf) (Typ.)
						(Max)	(@A)		
PESD11B8V0	E	8	17	1	9.3	23	1	0.5	4


Characteristic Curves

Non-repetitive peak pulse power

$$P_{pk} = f(t_p)$$

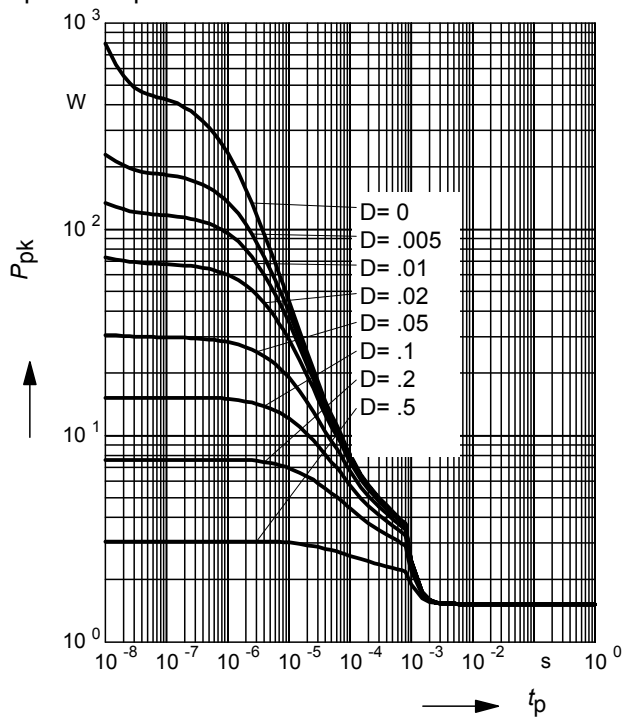


Power derating curve $P_{pk} = f(T_A)$

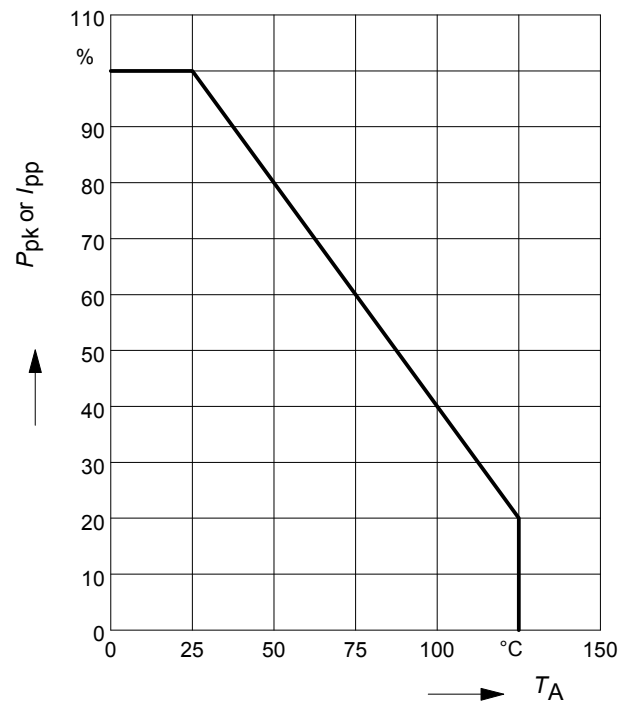

Characteristic Curves


Reverse current $I_R = f(V_R)$

$T_A =$ Parameter

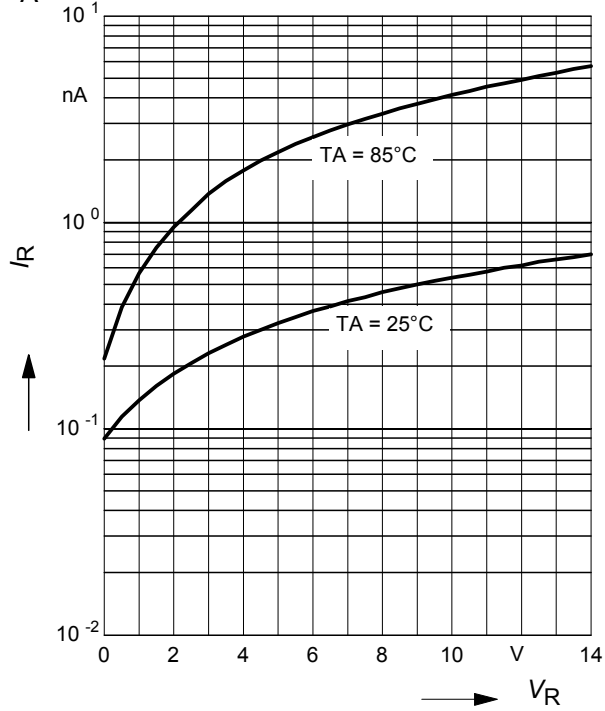


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$


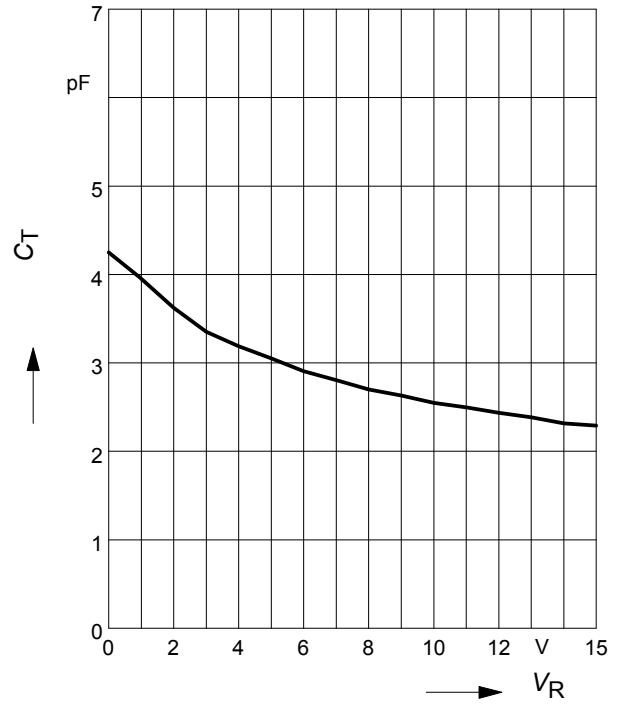


Application example

1 line, bi-directional

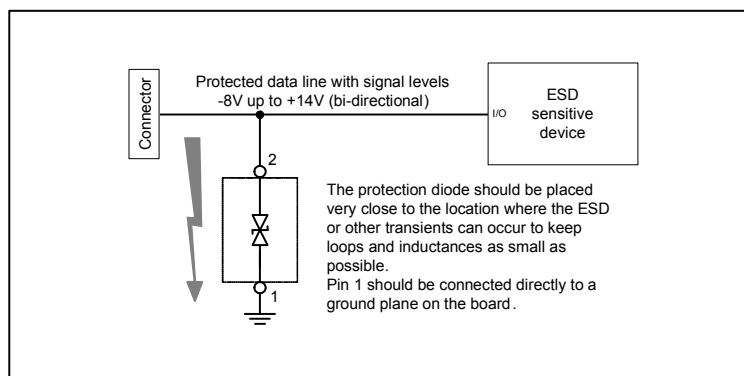

Dimensions

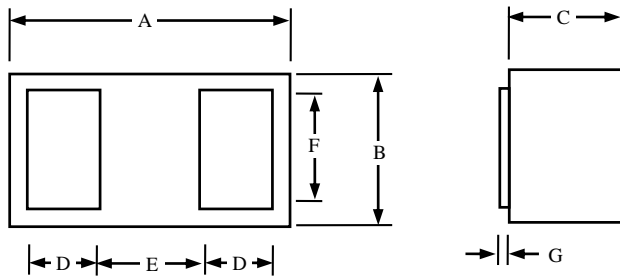


Unit: inch (mm)

Dimension	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.023	0.025	0.595	0.645
B	0.011	0.013	0.295	0.345
C	0.009	0.12	0.245	0.301
D	0.005	0.006	0.145	0.155
E	0.009	0.010	0.245	0.255
F	0.009	0.010	0.245	0.255
G	0.0002	0.0006	0.005	0.015

Standard Packing

Reel \varnothing 180 mm = 15.000 Pieces/Reel
 Reel \varnothing 330 mm = 50.000 Pieces/Reel (optional)

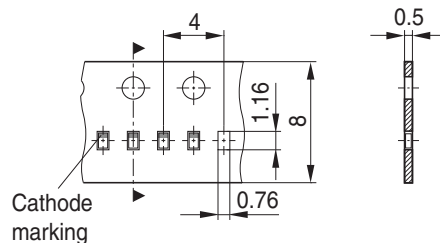

NOTICE

Leiditech reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Leiditech does not assume any liability arising out of the application or use of any product described herein.